

(12) **IN ACCORD WITH THE CONTRACT REGARDING INTERNATIONAL COOPERATION  
IN THE FIELD OF PATENT MATTERS (PCT) REGARDING INTERNATIONAL APPLICATIONS**

(19) World Organization for Intellectual  
Property (International Bureau)



(43) International Publication Date  
29. Juli 2004 (29.07.2004)

PCT

(10) International Publication Number:  
**WO 2004/062963 A1**

(51) International Patent Classification<sup>7</sup> B60N 2/48

(21) International File No.: PCT/EP2004/000129

(22) International Date of Application:  
12. Januar 2004 (12.01.2004)

(25) Language of Submission German

(26) Language of Disclosure German

(30) Statements of Priority:  
103 00 832.2 10. Januar 2003 (10.01.2003) DE

(71) Applicant (for all contract states except the  
US) ALFMEIER PRÄZISION AG [DE/DE]; Bangrup-  
pen und Systemlösungen, Industriestr. 5, 91757 Trenchlin-  
gen (DE).

(71) Applicant (Only for AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR): DAIMLER-CHRYSLER AG [DE/DE];  
70546 Stuttgart (DE).

(72) Inventor; and


(75) Inventor/Applicant: (For US only) EBBESKOTTE, Ul-  
rich [DE/DE]; Clansweg 23, 75382 Neuhengstett (DE).  
KRAFT, Dieter [DE/DE]; Untere Hauptstrasse 3, 91799  
Langenlathen (DE).

(74) Attorney: MÖRTEL & HÖFNER; Blumenstrasse 1,  
90402 Nürnberg (DE).

(81) Contract states (insofar as not otherwise  
stated, for each applicable national protection right): AE, AG, AL,  
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH,

[See continuation on next page]

(54) Title: FASTENING DEVICE FOR THE HEADREST OF A VEHICLE SEAT

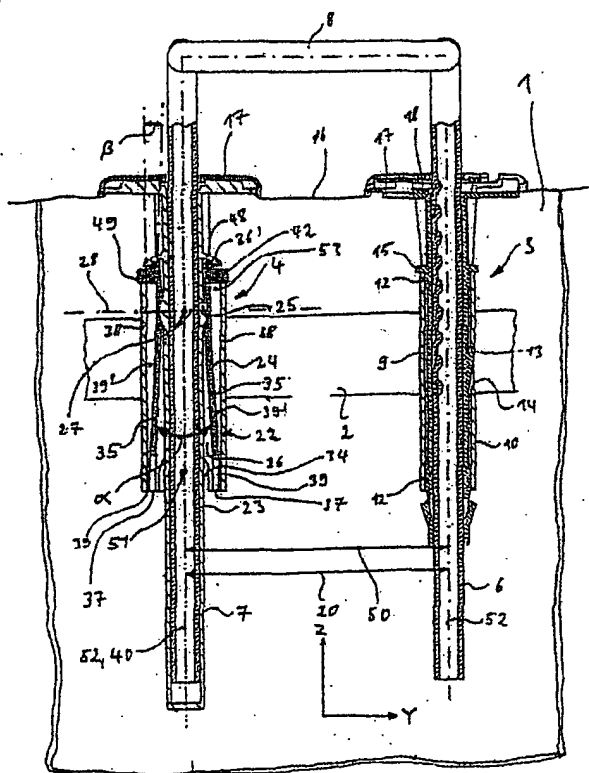

(57) **Abstract:** The invention relates to a fastening de-  
vice for the headrest of a vehicle seat, comprising two  
fixtures which are spaced apart in the transversal direc-  
tion (Y) of the seat and guide two rods (6, 7) that sup-  
port the headrest so as to be able to adjust the height  
thereof. Said fastening device encompasses a fixture  
comprising a first guiding sleeve (23) that receives and  
slidingly directs a support rod (7), and a support (24)  
which is guided on the frame (2) of the vehicle seat so  
as to be movable in the transversal direction (Y) of the  
seat, and on which the guiding sleeve (23) is mounted  
so as to be pivotable about a first swivel pin (27) ex-  
tending in the longitudinal direction of the seat (X).

WO 2004/062963 A1